


INTEGRITY

POOL PRODUCTS

2009 ABOVE GROUND VINYL SELECTION

All Patterns Are Available In Perma 25 Only


OVERLAP

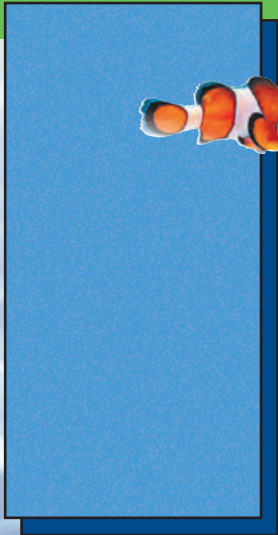


Blue / Blue



Blue / Streamstone

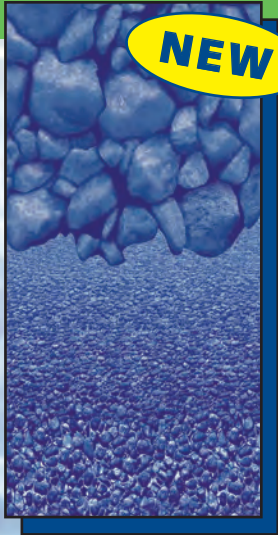

Boulder Bay / Streamstone
Also available in 54" Heavy Gauge

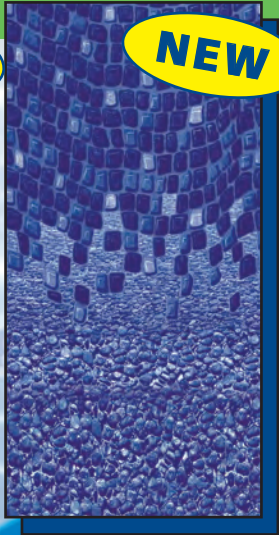

Ocean Wave / Streamstone




Full Prism


BEADED



Brighton / Prism

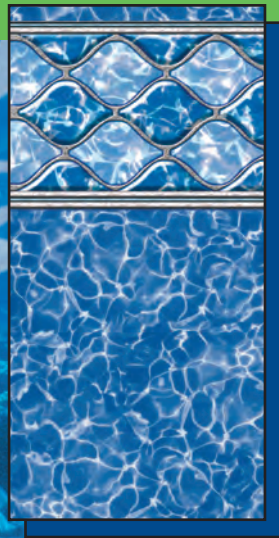

Diamond Wave / Prism
Also available in 52" Heavy Gauge

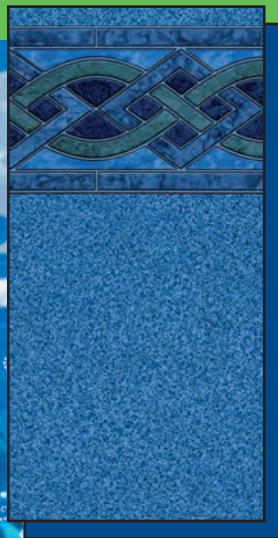

Indigo Marble / Blue Speckle

Above Ground Vinyl Liners

All Integrity liners are available in the following beads –



EZ-Bead



J-Bead



E W Bead



Standard Bead

INTEGRITY AG LADDER

Strong, stable & the most versatile above-ground pool ladder ever offered.

The Integrity AG Ladder is built on experience – over 45 years of it. For maximum family enjoyment, we didn't skip a step.



"Deck-To-Pool"

"A" Frame Design
Available in white and gray.

USE THE STRONGEST MATERIALS The Integrity AG Ladder is molded of rugged, high-impact resistant thermoplastic. It resists pool chemicals, and contains UV inhibitors – for years of safe, carefree use.

EASY-CLIMBING STEPS The Integrity AG Ladder has five steps – rather than the typical four. We set the first tread low, and the others just over 10" apart. Result: easier climbing, particularly for kids and seniors.

ANTI-SLIP TREADS We mold in texture – rather than glue it on. The result: superior, permanent traction on both steps and deck.

BUILT-IN VERSATILITY Adjustable to three pool heights: 48", 52" and 54". The A-frame ladder is convertible to deck-to-pool or stand-alone. And on the A-frame, there is a removable, portable outside ladder.

NO COMPROMISE ON QUALITY OR SAFETY The Integrity AG Ladder is designed according to the NEW ANSI-NSPI supplemental standards effective December 31, 2004. The new Integrity AG ladder was designed with enhanced features and manufactured under the International ISO 9001:2000 Quality Standard.

Integrity AG Ladder weight limit 300 lbs.
Exceeds NSPI standards

5 Year Warranty



Division of Latham Manufacturing
1-800-562-0024

